# **Unit V: Internetworking protocols**

- Network Protocols
- Email Architecture
- Web server
- Browsers
- Domain Name System
- IP protocol
- IP addresses
- IPv6.
- Introduction to Wi-Fi & 4G technology.

#### **Network Protocols**

- **Network Protocols** are a set of guidelines governing the exchange of information in a simple, dependable and secure way.
- Network protocols are formal standards and policies comprised of rules, methodology, and configurations that define communication between two or more devices over a network.
- To effectively send and receive information, devices on the two sides of a communication exchange must follow protocols.

#### **Network Time Protocol:**

Network Time Protocol (NTP) is a protocol that synchronizes the clocks of computer systems over data networks. NTP was designed by David L. Mills. NTP permits network devices to synchronize their time settings with the NTP server. NTP is one of the most established internet protocols in current use.

### **Domain Name System:**

- DNS resolves a Uniform Resource Locator or website address to the IP address of the site
- When users type a web address into the address bar they rely on DNS servers to resolve the actual IP address of that destination. DNS translates domain names to IP addresses.

A host wants the IP address of cse.dtu.in



### **Routing Information Protocol:**

It constrains the number of hops permitted in a path on a network from the source device to the destination. The maximum number of hops permitted for RIP is fifteen.

- It is a routing protocol used to exchange routing information. It figures the best route based on hop count.
- It actualizes the split horizon, route poisoning and, hold down mechanisms.
- It is a dynamic routing protocol which uses hop count as a routing metric to find the best path between the source and the destination network

#### **Dynamic Host Control Protocol:**


Dynamic Host Control Protocol (DHCP) uses a server to allocate an IP address and other configuration information to network devices.

 As a result, the device is getting a permission slip from the DHCP server to use the network.

- DHCP enables users to send a request to the DHCP server whenever they connect to a network.
- The server recognizes by providing an IP address to the user.

## **Email Architecture**

- The term "e-mail" applies both to the Internet e-mail system based on the Simple Mail Transfer Protocol (SMTP) and to intranet systems allowing users within one organization to e-mail each other.
- Often workgroup collaboration organizations may use the Internet protocols for internal e-mail service. E-mail is often used to deliver bulk unwanted messages, or "spam", but filter programs exist which can automatically delete most of these. E-mail systems based on RFC 822 are widely used.

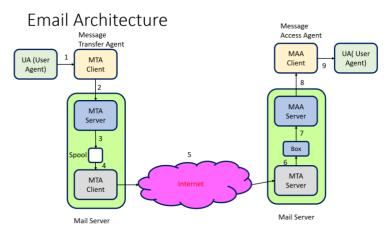

- E-mail system normally consists of two sub systems
- 1. the user agents
- 2. the message transfer agents
- The user agents allow people to read and send e-mails. The message transfer agents
  move the messages from source to destination. The user agents are local programs that
  provide a command based, menu-based, or graphical method for interacting with email system. The message transfer agents are daemons, which are processes that run
  in background. Their job is to move datagram e-mail through system.
- A key idea in e-mail system is the distinction between the envelope and its contents.
   The envelope encapsulates the message. It contains all the information needed for transporting the message like destinations address, priority, and security level, all of which are distinct from the message itself.

#### The Header:

- The header contains control information for the user agents. It is structured into fields such as summary, sender, receiver, and other information about the e-mail.
- Body:
- The body is entirely for human recipient. The message itself as unstructured text; sometimes containing a signature block at the end

#### 2 Header format

- The header is separated from the body by a blank line.
- consists of following fields
- From: The e-mail address, and optionally name, of the sender of the message.
- To: one or more e-mail addresses, and optionally name, of the receiver's of the message.
- Subject: A brief summary of the contents of the message.
- Date: The local time and date when the message was originally sent.

CLASS: BSC SY Sub: Computer Network Prepared by : Dr. R. B. Shinde


E-mail system based on RFC 822 contains the message header as shown in figure 8.2. The figure gives the fields along with their meaning.

Mail From: abc@xyz.com Recpt To: LMN@xyz.com	Envelop	
From: abc@xyz.com To: Imn@xyz.com Date: 5/2/2020 Subject: CN Notes	Header	
Dear Friend, I want CN Notes Unit2 Yours Truly, abc@xyz.com	Body	Message

- Web server is a computer where the web content is stored. Basically web server is used to host the web sites but there exists other web servers also such as gaming, storage, FTP, email etc.
- Web site is collection of web pages while web server is a software that respond to the request for web resources.

# **Web Server Working:**

- Web server respond to the client request in either of the following two ways:
- Sending the file to the client associated with the requested URL.
- Generating response by invoking a script and communicating with database

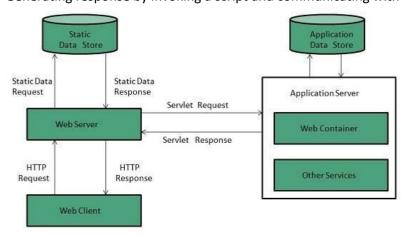

## **Key Points:**

- When client sends request for a web page, the web server search for the requested page if requested page is found then it will send it to client with an HTTP response.
- If the requested web page is not found, web server will the send an HTTP response:Error 404 Not found.
- If client has requested for some other resources then the web server will contact to the application server and data store to construct the HTTP response. Architecture:

CLASS: BSC SY

Sub: Computer Network Prepared by : Dr. R. B. Shinde

Web Server Architecture follows the following two approaches:

- 1. Concurrent Approach
- 2. Single-Process-Event-Driven Approach.

#### 1. Concurrent Approach

Concurrent approach allows the web server to handle multiple client requests at the same time. It can be achieved by following methods:

- 1. Multi-process
- 2. Multi-threaded
- 3. Hybrid method.

#### 4. Multi-processing

In this a single process (parent process) initiates several single-threaded child processes and distribute incoming requests to these child processes. Each of the child processes are responsible for handling single request.

It is the responsibility of parent process to monitor the load and decide if processes should be killed or forked.

Multi-threaded

Unlike Multi-process, it creates multiple single-threaded process.

Hybrid

It is combination of above two approaches. In this approach multiple process are created and each process initiates multiple threads. Each of the threads handles one connection. Using multiple threads in single process results in less load on system resources.

	S.N. Web Server Descriptino	Web Server Descriptino		
1	Apache web server is ar	HTTP  ar web server in the world developed by the Apache S  n open source software and can be installed on almost a  /indows, FreeBSD, Mac OS X and more. About 60% of the  rver.	all operating systems	
2.	server runs on Windows version also). IIS comes	ervices (IIS)  n Server (IIS) is a high performance Web Server from Mic  s NT/2000 and 2003 platforms (and may be on upcoming bundled with Windows NT/2000 and 2003; Because IIS is  em so it is relatively easy to administer it.	new Windows	
3.	operating system. This o	ed lighty is also a free web server that is distributed with open source web server is fast, secure and consumes muon Windows, Mac OS X, Linux and Solaris operating system	ch less CPU power.	
4.	is free it is not open sou System web server supp	erver  In Microsystems is suited for medium and large web sites  Irce. It however, runs on Windows, Linux and UNIX platfor  Ports various languages, scripts and technologies required  P, Perl, Python, and Ruby on Rails, ASP and Coldfusion et	orms. The Sun Java d for Web 2.0 such	
5.	can run on various platfo	omes from the World Wide Web Consortium. It is open s forms like Linux, UNIX, Windows, and Mac OS X etc. Jigsa scripts and PHP programs.		

### **Browsers:**

- **web Browser** is an application software that allows us to view and explore information on the web. User can request for any web page by just entering a URL into address bar.
- Web browser can show text, audio, video, animation and more. It is the responsibility of a web browser to interpret text and commands contained in the web page.

CLASS: BSC SY Sub: Computer Network Prepared by : Dr. R. B. Shinde

• Earlier the web browsers were text-based while now a days graphical-based or voice-based web browsers are also available. Following are the most common web browser available today:

## **Examples of Browsers:**

Browser	Vendor
Internet Explorer	Microsoft
Google Chrome	Google
Mozilla Firefox	Mozilla
Netscape Navigator	Netscape Communications Corp.
Opera	Opera Software
Safari	Apple
Sea Monkey	Mozilla Foundation
K-meleon	K-meleon

## **Architecture:**

- There are a lot of web browser available in the market. All of them interpret and display information on the screen however their capabilities and structure varies depending upon implementation. But the most basic component that all web browser must exhibit are listed below:
- Controller/Dispatcher
- Interpreter
- Client Programs
- **Controller** works as a control unit in CPU. It takes input from the keyboard or mouse, interpret it and make other services to work on the basis of input it receives.
- Interpreter receives the information from the controller and execute the instruction line by line. Some interpreter are mandatory while some are optional For example, HTML interpreter program is mandatory and java interpreter is optional.
- **Client Program** describes the specific protocol that will be used to access a particular service. Following are the client programs that are commonly used:
- HTTP
- SMTP
- FTP
- NNTP
- POP

### **Domain Name System:**


- DNS is like a phone book for the internet. If you know a person's name but don't know their telephone number, you can simply look it up in a phone book. DNS provides this same service to the internet.
- When you visit https://dyn.com in a browser, your computer uses DNS to retrieve the
  website's IP address of 50.16.85.103. Without DNS, you would only be able to visit our
  website (or any website) by visiting its IP address directly, such as http://50.16.85.103.

- DNS stands for Domain Name System. A domain is a unique string (Gingernameclub.com) associated with an IP address.
- An IP address is a string of numbers used to identify a computer or resource on a network or internet.
- The Domain Name System (DNS) is a network of directories on the internet used to resolve host names (e.g., www.gingernameclub.com) into machine-readable IP addresses (e.g., 192.168.106.81).

How does DNS work?L

DNS translates the domain name into IP address automatically. Following steps will take you through the steps included in domain resolution process:


- When we type **www.google.com** into the browser, it asks the local DNS Server for its IP address. Here the local DNS is at ISP end.
- When the local DNS does not find the IP address of requested domain name, it forwards the request to the root DNS server and again enquires about IP address of it.
- The root DNS server replies with delegation that I do not know the IP address of www.google.com but know the IP address of DNS Server.
- The local DNS server then asks the com DNS Server the same question.
- The **com** DNS Server replies the same that it does not know the IP address of www.google.com but knows the address of google.com.
- Then the local DNS asks the google.com DNS server the same question.
- Then google.com DNS server replies with IP address of www. google.com.
- Now, the local DNS sends the IP address of www. google.com to the computer that sends the request.

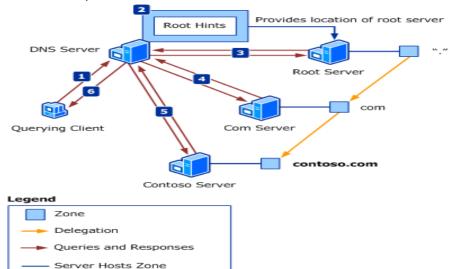

#### **DNS SERVERS:**

- Servers are the systems where HTML files, Text, Audio, Video information is stored.
- DNS Servers are the systems that provide IP address of the web site.
- There are 4 types of DNS Servers.
  - DNS recursive resolver/ DNS resolver
  - Root Name Server
  - Top Level Domain/ TLD server
  - Authoritative name server.
- DNS resolver are the Internet service provider that connect to the computer through internet.
- DNS Name servers: There are 13 sets of servers. Named as A to M except G where g is used to store home page. Logically it is represented by letter.root.server.net These servers are operated by 12 organizations

- TLD name servers holds the all domain name like .com, .net, .in, .edu etc. eg. .com TLD name server tolds the web browsers about all the websites who ends with .com
- Authoritative name server is the last server who tolds the IP address of the web site

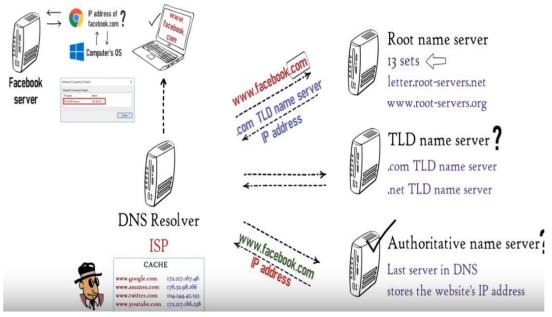

## **IP Addressing:**

- In Computer network there are two types of addressing
- 1. Physical Addressing (MAC Address it is of 48 bits
- 2. Logical Addressing

It is of two type

- 1. IPv4
- a. Public IPv4
- b. Private IPv4
- 2. IPv6

### IPv6.:


• The network layer that is present in use in commonly referred to as IPv4. Although IPv4 is well designed and has helped the internet to grow rapidly, it has some deficiencies, These deficiencies has made it unsuitable for the fast growing internet. To overcome these deficiencies, Internet Protocol, Version 6 protocol has been proposed and it has evolved into a standard.

## Important features of IPv6 are highlighted below:


- IPv6 uses 128-bit address instead of 32-bit address to provide larger address space
- Uses more flexible header format, which simplifies and speeds up the routing process
- Basic header followed by extended header
- Resource Allocation options, which was not present in IPv4
- Provision of new/future protocol options
- Support for security with the help of encryption and authentication
- Support for fragmentation at source

### **IPV6 Addressing Method:**

- It is made up of 128 bits
- Divided into 8 octa of 16bit blocks
- Each block is then converted into 4-digit Hexadecimal numbers separated by colon (:) symbol
- Eg. Of IPv6 IP Address
   2001:0000:3238:DEF1:0063:0000:0000:FEFB

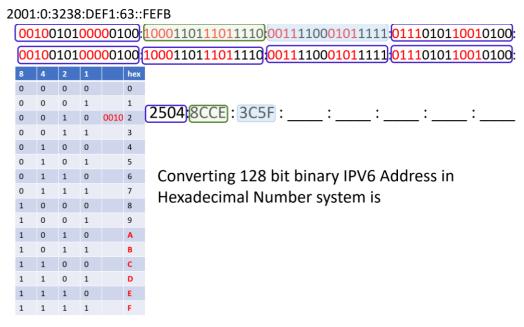

IPV 6 Header Format 40 Bytes(320 bits)

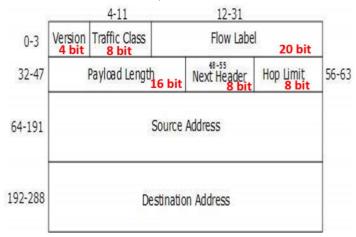

**Version** (4-bits): It represents the version of Internet Protocol, i.e. 0110.

**Traffic Class** (8-bits): These 8 bits are divided into two parts. The most significant 6 bits are used for Type of Service to let the Router Known what services should be provided to this packet. The least significant 2 bits are used for Explicit Congestion Notification (ECN).

**Flow Label** (20-bits): This label is used to maintain the sequential flow of the packets belonging to a communication

**Payload Length** (16-bits): This field is used to tell the routers how much information a particular packet contains in its payload. Payload is composed of Extension Headers and Upper Layer data. With 16 bits, up to 65535 bytes can be indicated

**Next Header** (8-bits): This field is used to indicate either the type of Extension Header, or if the Extension Header is not present then it indicates the Upper Layer PDU

**Hop Limit** (8-bits): This field is used to stop packet to loop in the network infinitely.

Source Address (128-bits): This field indicates the address of originator of the packet.

**Destination Address** (128-bits): This field provides the address of intended recipient of the packet.

#### WIFI Technology

WiFi stands for <u>Wi</u>reless <u>Fi</u>delity. WiFilt is based on the IEEE 802.11 family of standards
and is primarily a local area networking (LAN) technology designed to provide inbuilding broadband coverage.

- Current WiFi systems support a peak physical-layer data rate of 54 Mbps and typically provide indoor coverage over a distance of 100 feet.
- WiFi has become the *de facto* standard for *last mile* broadband connectivity in homes, offices, and public hotspot locations. Systems can typically provide a coverage range of only about 1,000 feet from the access point.

#### **Radio Signals:**

- Radio Signals are the keys, which make WiFi networking possible. These
  radio signals transmitted from WiFi antennas are picked up by WiFi
  receivers, such as computers and cell phones that are equipped with WiFi
  cards.
- Whenever, a computer receives any of the signals within the range of a
  WiFi network, which is usually 300 500 feet for antennas, the WiFi card
  reads the signals and thus creates an internet connection between the
  user and the network without the use of a cord.



#### WiFi Cards:

- You can think of WiFi cards as being invisible cords that connect your computer to the antenna for a direct connection to the internet.
- WiFi cards can be external or internal. If a WiFi card is not installed in your computer, then you may purchase a USB antenna attachment and have it externally connect to your USB port, or have an antenna-equipped expansion card installed directly to the computer (as shown in the figure given above). For laptops, this card will be a PCMCIA card which you insert to the PCMCIA slot on the laptop.
   Introduction to Wi-Fi & 4G technology.
- WiFi Technology is a proficient used by mobiles, workplaces, home and computer systems all around the world.
- Newest entrenched wireless fidelity representations are outfitted by real time operating systems that allow communication by means of serial ports so we can say that WiFi Technology is a standard of communication among wireless devices and computers all over the world.
- The world's leading WiFi Technology network is simply a name of freedom which permits you to connect your computer with any device as PDA without any expense of wires
- Just imagine you are sitting in a coffee shop and chatting with your friend for fun, traveling with airport and in touch with your business, working in a office or taking tea in company cafeteria and checking your today business status Now you can use internet share your files making conference with your client and these all thing possible yes your work and outing both are going and it is possible only with WiFi Technology.
- There are several specifications in the 802.11 family –
- 802.11 This pertains to wireless LANs and provides 1 or 2-Mbps transmission in the 2.4-GHz band using either frequency-hopping spread spectrum (FHSS) or directsequence spread spectrum (DSSS).
- **802.11a** This is an extension to 802.11 that pertains to wireless LANs and goes as fast as 54 Mbps in the 5-GHz band. 802.11a employs the orthogonal frequency division multiplexing (OFDM) encoding scheme as opposed to either FHSS or DSSS.
- 802.11b The 802.11 high rate WiFi is an extension to 802.11 that pertains to wireless LANs and yields a connection as fast as 11 Mbps transmission (with a fallback to 5.5, 2, and 1 Mbps depending on strength of signal) in the 2.4-GHz band. The 802.11b specification uses only DSSS. Note that 802.11b was actually an amendment to the original 802.11 standard added in 1999 to permit wireless functionality to be analogous to hard-wired Ethernet connections.

CLASS: BSC SY

Sub: Computer Network Prepared by : Dr. R. B. Shinde

- **802.11g** This pertains to wireless LANs and provides 20+ Mbps in the 2.4-GHz band.
- Mobile Applications
- Business Applications
- Home Applications
- Computerized Applications
- Automotive Segment
- Browsing Internet
- Video Conference

# **4G Technology**

- 4G technology refer to or short name of fourth Generation which was started from late 2000s.
- Capable of providing 100Mbps 1Gbps speed.
- One of the basic term used to describe 4G is MAGIC.

#### MAGIC:

- **♦** Mobile Multimedia
- **♦**Anytime Anywhere
- ♦Global Mobility Support
- **◆Integrated Wireless Solution**
- **◆**Customized Personal Services

Also known as Mobile Broadband Everywhere.

#### **Advantages**

- The next generations of wireless technology that promises higher data rates and expanded multimedia services.
- Capable to provide speed 100Mbps-1Gbps.
- ♦ High QOS and High Security
- ◆ Provide any kind of service at any time as per user requirements, anywhere.

#### Features Include:

- More Security
- High Speed
- ► High Capacity
- Low Cost Per-bit etc.



# Disadvantages

- Battery uses is more
- Hard to implement
- Need complicated hardware
- Expensive equipment required to implement next generation network.

